



TAILIN®


Non-Woven Polishing Wheels



TAILIN

Non-woven Polishing Wheels offer you the greatest selection of grades and hardness for a wide range of job in your shop or plant. They are not only excellent for deburring and polishing metal and non-metal parts but also an excellent starting point in a light-duty finishing and cleaning operation.

Non-woven Polishing Wheels can be mounted on angle grinder machines for working on wider surface.

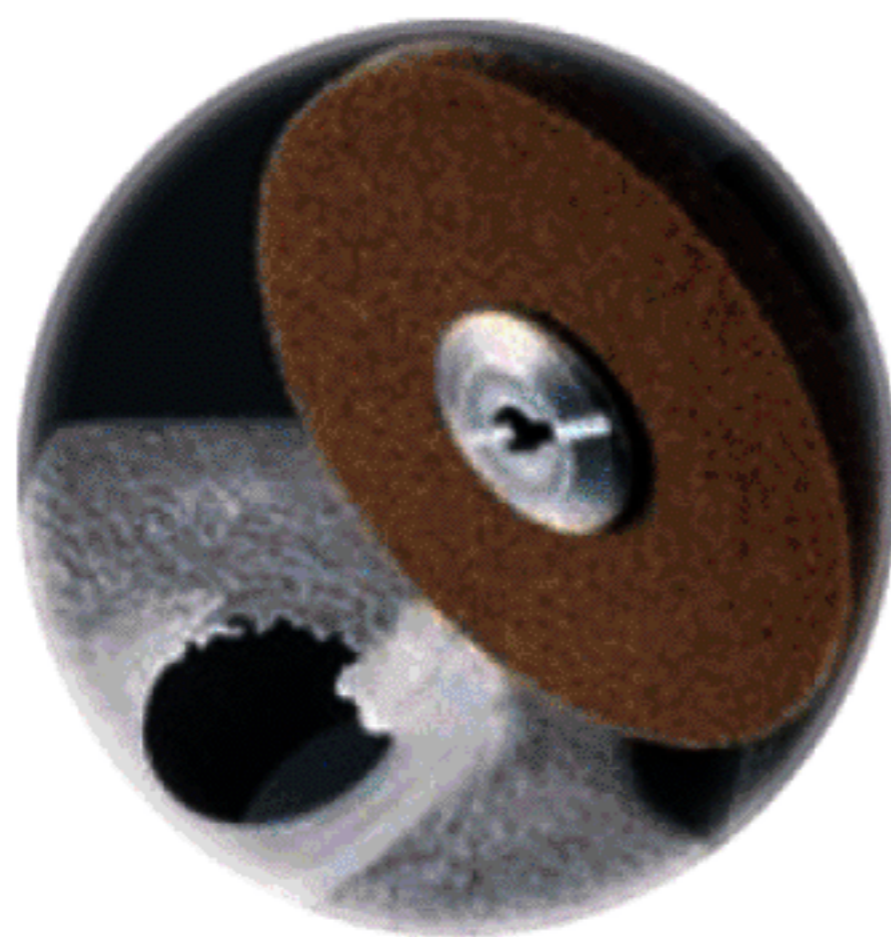

APPLICATION

Removal of coating, paints, oxides, corrosion and rust.

Cleaning before and after welding.

Polishing, deburring and finishing for metal and stainless parts

SIZE	R.P.M.	STANDARD PACKAGING			N.W. (kgs)	G.W. (kgs)	CUFT
		PCS/SINGLE BOX	PCS/INNER BOX	PCS/CARTON			
NC 100*10*16 C240 3P	13700 RPM	10	50	200	11.2	13	2.18
N.W 6*1*1 C240 5P	6400 RPM		80	160	13.2	16.6	3.6
N.W 6*1*1 C240 7P	6400 RPM		80	160	13.2	16.6	3.6
N.W 6*1*1/2 C240 5P	6400 RPM		80	160	13.2	16.6	3.6
N.W 6*1*1/2 C240 7P	6400 RPM		80	160	13.2	16.6	3.6
N.W 6*1*1 C600 7P	6400 RPM		80	160	13.2	16.6	3.6